


示意图 SCHEMATIC

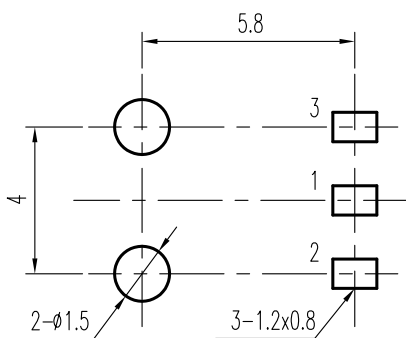

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	DC 12 V 1.0 A
初期接触电阻 Initial Contact Resistance	60 mΩ Max.
绝缘阻抗 Insulation Resistance	DC500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 500 V (50~60HZ) 60 Sec.

操作力 Operating Force	插入力 Insertion force	0.2—3.0 Kgf
	拔出力 Extraction force	0.2—3.0 Kgf
负荷寿命 Operating Life With Load		5,000 次 Cycles

6	PIN TERMINAL	C2680	1	Ag PLATED
5	SLEEVE TERMINAL	SUS 304	1	Ag PLATED
4	BREAK TERMINAL	C2680	1	Ag PLATED
3	P I N	C2680	1	Ag PLATED
2	HOUSING	NYLON+G	1	BLACK C
1	COVER	NYLON+G	1	BLACK C
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A02	初期接触电阻30mΩ变更为60mΩ 见 (b)	曹文斌	06-07-01
A01	ADD: 规格 Specifications 见 (a) 修改零件列表 见 (a)	王光云	06-06-08
01		孙斌	13 APR 02
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM2194			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	DC POWER JACK		ITEM NO	DC-077	
UNDER 1	± 0.10	DRAWN	曹文斌	06-07-01	VERSION	A02	PAGE 1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-07-01	SCALE		UNIT mm
OVER 10	± 0.50	APPROVED	林高全	06-07-03	PROJECTION		

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.