


MODEL NO.	D
DC-090 (1.0)	$\phi 1$
DC-090 (1.3)	$\phi 1.3$

规格 Specifications

额定负荷 Ratings	DC 12 V 1.0 A
初期接触电阻 Initial Contact Resistance	30 m $\Omega$ Max.
绝缘电阻 Insulation Resistance	DC 500V 60 Sec. 100 M $\Omega$ Min.
抗电强度 Dielectric	AC 500 V (50~60HZ) 60 Sec.

插拔力 Insertion and Extraction force	插入力 Insertion force	0.2—3.0 Kgf
	拔出力 Extraction force	0.2—3.0 Kgf
负荷寿命 Operating Life With Load	5000 次 Cycles	

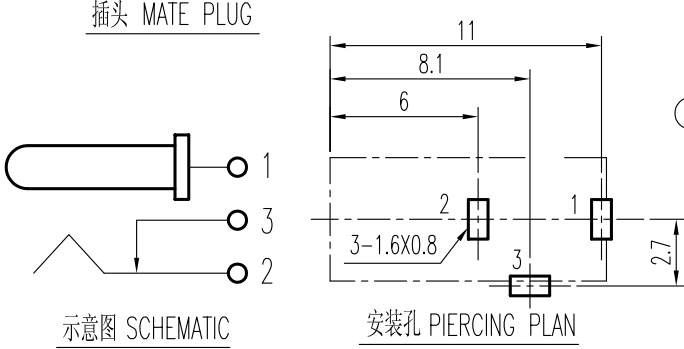

序号 NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
6	SLEEVE TERMINAL	SUS	1	Ag PLATED		修改零件列表见①	曹文斌	06-04-10
5	BREAK TERMINAL	C2680	1	Ag PLATED		机械寿命变为负荷寿命见①		
4	COVER	PA	1	BLACK		插拔力0.4-3Kgf变为0.2-3Kgf见①		
3	PIN TERMINAL	C2680	1	Ag PLATED		初期接触电阻50m $\Omega$ 变为30m $\Omega$ 见①		
2	HOUSING	PBT	1	BLACK	01		赖立辉	11 OCT 01
1	PIN	C3602	1	Ni PLATED				
					DWG NO.	ITEM2292		

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	DC POWER JACK		ITEM NO	DC-090	
UNDER 1	$\pm 0.10$	DRAWN	曹文斌	06-04-10	VERSION	A01	PAGE 1 OF 1
1 - 10	$\pm 0.30$	REVIEWED	张念明	06-04-10	SCALE		UNIT mm
OVER 10	$\pm 0.50$	APPROVED	林高全	06-04-10	PROJECTION		

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.