


MODEL NO.	D	FINISH
DC-342	ϕ 2	Ni PLATED
DC-342(2.3,Ag)	ϕ 2.3	Ag PLATED
DC-342(2.5)	ϕ 2.5	Ni PLATED

规格 Specifications

额定负荷 Ratings	DC 12 V 3.0 A
初期接触电阻 Initial Contact Resistance	30 m Ω Max.
绝缘电阻 Insulation Resistance	DC 500V 60 Sec. 100 M Ω Min.
抗电强度 Dielectric Voltage	AC 500V (50~60HZ) 60 Sec.

操作力 Operating Force (Kgf)	插入力 (Insertion Force)	0.2-3.0
	拔出力 (Extraction Force)	0.2-3.0
负荷寿命 Operating Life With Load	5,000 次 Cycles	

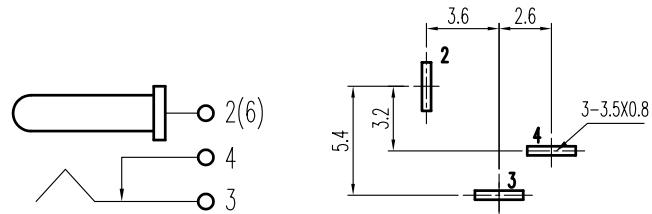

6	PIN TERMINAL	C2680	1	Ag PLATED	增加尺寸: 11.3、1.6、 ϕ 1.5 见 ①	刘红梅	2006-11-8	
5	COVER	PA	1	BLACK				15.2 \rightarrow 15.5, 6.5 \rightarrow 6.3 见 ①
4	BREAK TERMINAL	C2680	1	Ag PLATED				D \pm 0.1 \rightarrow 7.4 \pm 0.1, 20 \rightarrow 20.3 见 ①
3	SLEEVE TRMINAL	C5210	1	Ag PLATED	A01	修改见 ①		
2	PIN	C3602	1	见上表	01		赖立辉 1 APR 01	
1	HOUSING	PBT	1	BLACK	标号 REV	内容 DESCRIPTION	签名 SIGN. 日期 DATE	
					DWG NO. ITEM1929			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE		DC POWER JACK		ITEM NO		DC-342	
UNDER 1	\pm 0.10	DRAWN	刘红梅	2006-11-8	VERSION	A02	PAGE	1	OF 1
1 - 10	\pm 0.30	REVIEWED	张念明	2006-11-8	SCALE		UNIT	mm	
OVER 10	\pm 0.50	APPROVED	刘瑞富	2006-11-8	PROJECTION				

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.