
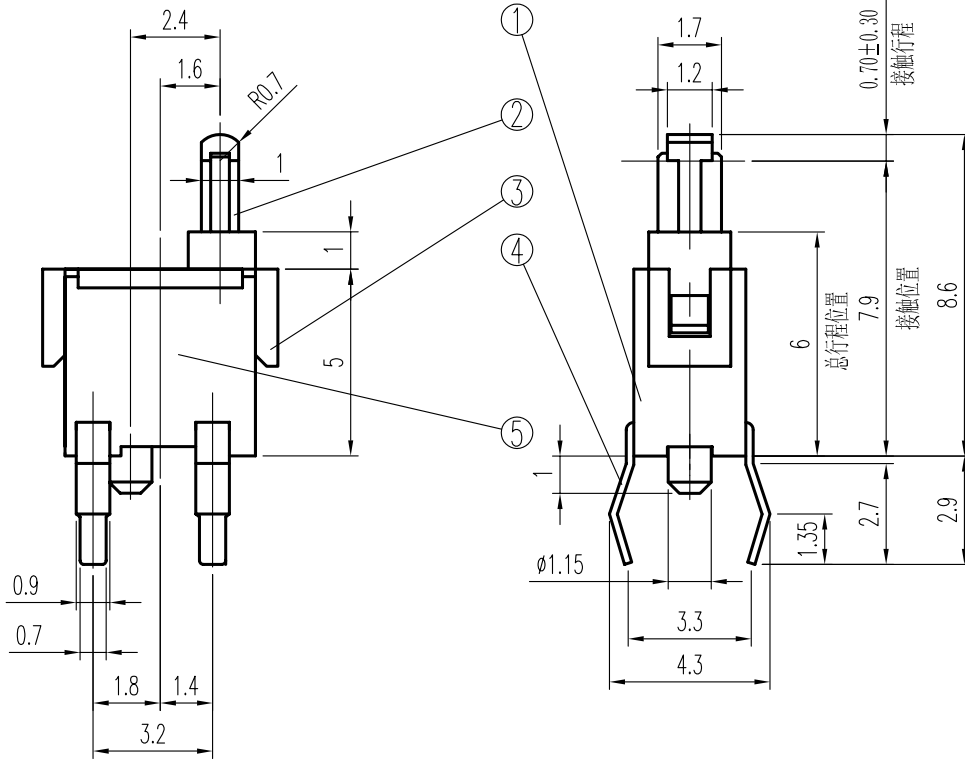


规格 Specifications

额定负荷 Rdtngs	DC 30 V 100m A
初期接触电阻 Initial Contact Resistance	1000 mΩ Max.
绝缘电阻 Insulation Resistance	DC100 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 100 V(50~60HZ) 60 Sec.

操作力 Operating Force	50 gf Max.
Ⓣ 负荷寿命 Operating Life With Load	50,000 次 Cycles

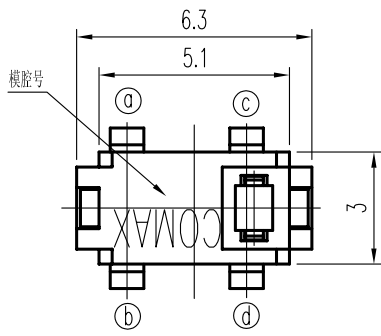

1P - 2T





示意图 SCHEMATIC



安装孔 PIERCING PLAN

5	弹簧 SPRING	C5191W	1	Au PLATED				
4	端子 TERMINAL	C2680R	4	Ag PLATED	A03	机械寿命变更为负荷寿命见Ⓣ	曹文斌	06-03-21
3	胶盖 COVER	PA	1	BLACK C	A02	增加字唛及模腔号见Ⓢ	曹文斌	23-05-05
2	胶柄 KNOB	PA	1	BLACK C	A01		曹文斌	22-04-05
1	胶壳 HOUSING	PA	1	BLACK C	标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM2495			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	DETECTOR SWITCH		ITEM NO	DS-02005		
UNDER 1	± 0.10	DRAWN	曹文斌	06-03-21	VERSION	A03	PAGE	1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-03-21	SCALE	NO SCALE	UNIT	mm
OVER 10	± 0.50	APPROVED	林高全	06-03-24	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.