

MATE PLUG





示意图 SCHEMATIC

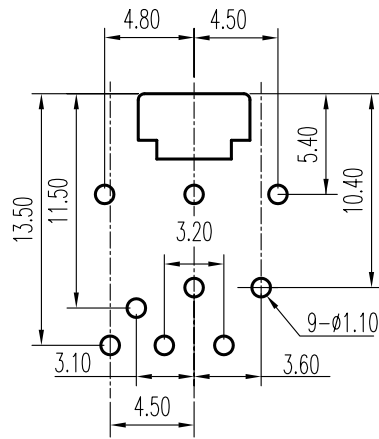

安装孔 PIERCING PLAN

规格 Specifications

① 额定负荷 Ratings	DC 12 V 1.0 A
② 初期接触电阻 Initial Contact Resistance	50 mΩ Max.
③ 绝缘电阻 Insulation Resistance	DC 500V 60 Sec. 100 MΩ Min.
④ 抗电强度 Dielectric Voltage	AC 500 V (50~60HZ) 60 Sec.

插入力 Insertion and Extraction force	插入力 Insertion force	0.3 — 3.0 Kgf
	拔出力 Extraction force	0.3 — 3.0 Kgf
⑤ 负荷寿命 Operating Life With Load	5000 次 Cycles	

8	RING SPRING (2)	C5210	1	Ag PLATED	A01	机械寿命变更为负荷寿命见① 绝缘阻抗变更为绝缘电阻见① 接触阻抗变更为初期接触电阻见① 增加额定负荷DC 12V 1.0A见① 增加零件列表见①	曹文斌	06-07-07
7	TIP SPRING	C5210	1	Ag PLATED				
6	BREAK TERMINAL (2)	C5210	1	Ag PLATED				
5	RING SPRING (1)	C5210	1	Ag PLATED				
4	BREAK TERMINAL (1)	C2680	1	Ag PLATED				
3	TRANSFER TERMINAL	C5210	1	Ag PLATED	01		蔡维	16 JUL 04
2	EARTH TERMINAL	C5210	1	Au PLATED				
1	HOUSING	PBT	1	YELLOW	标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM2372			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	EAR PHONE JACKS		ITEM NO	EJ-35363-11 Y		
UNDER 1	± 0.10	DRAWN	曹文斌	06-07-07	VERSION	A01	PAGE	1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-07-07	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	林高全	06-07-11	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.