


示意图 SCHEMATIC

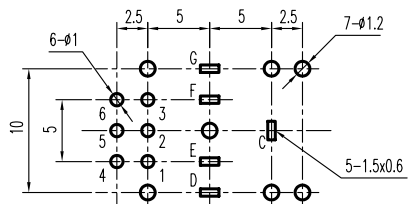

安装孔 PIERCING PLAN

① 规格 Specifications

额定负荷 Ratings	DC 12 V 1.0 A
初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC500V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 500 V(50~60HZ) 60 Sec.

插拔力 Insertion and Extraction force	插入力 Insertion force	0.3—3.0 Kgf
	拔出力 Extraction force	0.3—3.0 Kgf
负荷寿命 Operating Life With Load	5000 次 Cycles	

10	CLIP HOLDER	PA	1	BLACK
9	CLIPS	C5210	2	Ag CLAD
8	TERMINAL	C2680	6	Ag PLATED
7	COVER	POM	1	BLACK
6	BASE	PA	1	YELLOW
5	TIP TERMINAL	SUS	1	Ag PLATED
4	RING TERMINAL	C5210	1	Ag PLATED
3	BREAK TERMINAL	C2680	2	Ag PLATED
2	EARTH TERMINAL	C5210	1	Ag PLATED
1	HOUSING	PBT	1	BLACK

A01	修改零件列表见①	曹文斌	06-04-10
	增加规格栏见①		
01		赖立辉	28 NOV 01
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE

序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO.	ITEM2046
------	---------	-------------	--------	------------	---------	----------

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	EAR PHONE JACKS		ITEM NO	EJ-3563-5	
UNDER 1	± 0.10	DRAWN	曹文斌	06-04-10	VERSION	A01	PAGE 1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-04-10	SCALE		UNIT mm
OVER 10	± 0.50	APPROVED	林高全	06-04-10	PROJECTION		

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.