
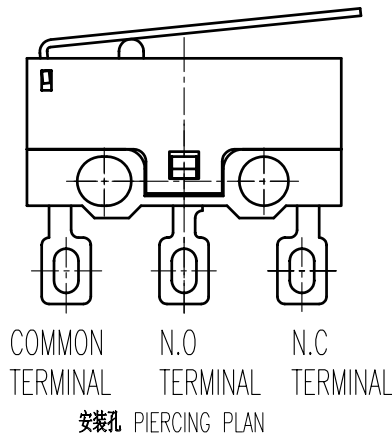


规格 Specifications

额定负荷 Ratings	DC 30 V 0.1 A
初始接触电阻 Initial Contact Resistance	50 mΩ Max.
绝缘电阻 Insulation Resistance	DC 500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 1000 V(50~60HZ) 60 Sec.
① 操作力 Operating Force (O.F.)	25 ± 15 gf
② 回复力 Releasing Force(R.F.)	5 gf Min.
③ 自由位置 Free Position(F.P.)	10 mm Max.
④ 动作位置 Operating Position (O.P.)	7.50 ± 0.80 mm
⑤ 过行程 Over Travel(O.T.)	0.50 mm Min.
⑥ 差程 Movement Differential Travel(D.T.)	0.50 mm Max.
⑦ 机械寿命 Operating Life Without Load	500,000 Cycles
⑧ 负荷寿命 Operating Life With Load	50,000 Cycles

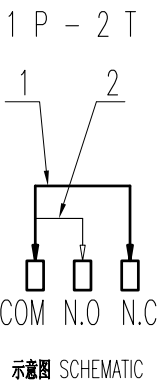

A01	增加杠杆长度尺寸标注13.30见 ①	曹文斌	2006-11-21
	增加机械寿命500000次见 ⑦		
	过行程0.20mm Min. 变更为0.50mm Min. 见 ⑤		
	动作位置7.20 ± 0.80mm 变更为7.50 ± 0.80mm 见 ④		
	接触行程1.8mm Max. 变为自由位置10mm Max. 见 ③		
P01	回复力10gf Min. 变更为5gf Min. 见 ②	陈华水	04.08.03
操作力30 ± 10gf 变更为25 ± 15gf 见 ①			
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM2384			

序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS
6	杠杆 LEVER	SUS	1	NATURAL
5	弹片 CONTACT SPRING	C1720	1	Ag PLATED
4	端子 TERMINAL	C2680R	3	Ag PLATED
3	胶壳 HOUSING	PBT	1	BLACK C
2	胶柄 KNOB	PBT	1	RED
1	胶盖 COVER	PBT	1	BLACK C

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	MICRO SWITCH		ITEM NO	MS-118405-A		
UNDER 1	± 0.10	DRAWN	曹文斌	2006-11-21	VERSION	A01	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	2006-11-22	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	刘瑞富	2006-11-22	PROJECTION			

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.