


示意图 SCHEMATIC

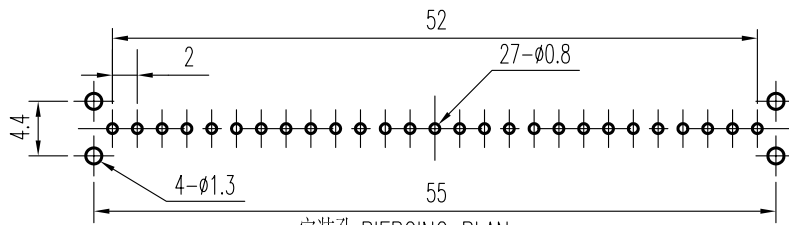

安装孔 PIERCING PLAN

TIMING	KNOB COLOUR
NON-SHORTING	BLACK
SHORTING	ORIGINAL OR WHITE

规格 Specifications

额定负荷 Ratings	DC 30 V 0.3 A
① 初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 500 V (50~60HZ) 60 Sec.
操作力 Operating Force (gf)	(L)
	250 ± 100 300 ± 100
① 负荷寿命 Operating Life With Load	10,000 次 Cycles

6	弹簧 SPRING	STEEL	1	Ni PLATED	A02	接触阻抗 —— 初期接触电阻 见①	王光云	06-04-14
5	端子 TERMINAL	C2680R	27	Ag PLATED		机械寿命 —— 负荷寿命 见①		
4	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW	A01	ADD: 规格 Specifications 见②	王光荣	06-02-10
3	接触片 CONTACT	C5210R	9	Ag CLAD		C2680R-EH —— C2680R 见②		
2	胶柄 KNOB	P C	1	见上表	01		赖立辉	2 JUL 92
1	铁壳 FRAME	S P C C	1	Ni PLATED	标号 REV	内容 DESCRIPTION	签名 SIGN	日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM0388			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	PUSH SWITCH		ITEM NO	PS-92D05		
UNDER 1	± 0.10	DRAWN	王光云	06-04-14	VERSION	A02	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-04-14	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	林高全	06-04-15	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.