
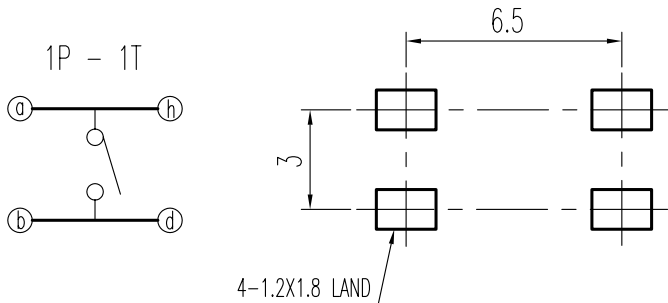


①	H	FORCE(gf)	KNOB COLOR
	A 3.8	H 100±30	WHITE (WK)
	B 7.0	1 160±30	BLACK (BK)

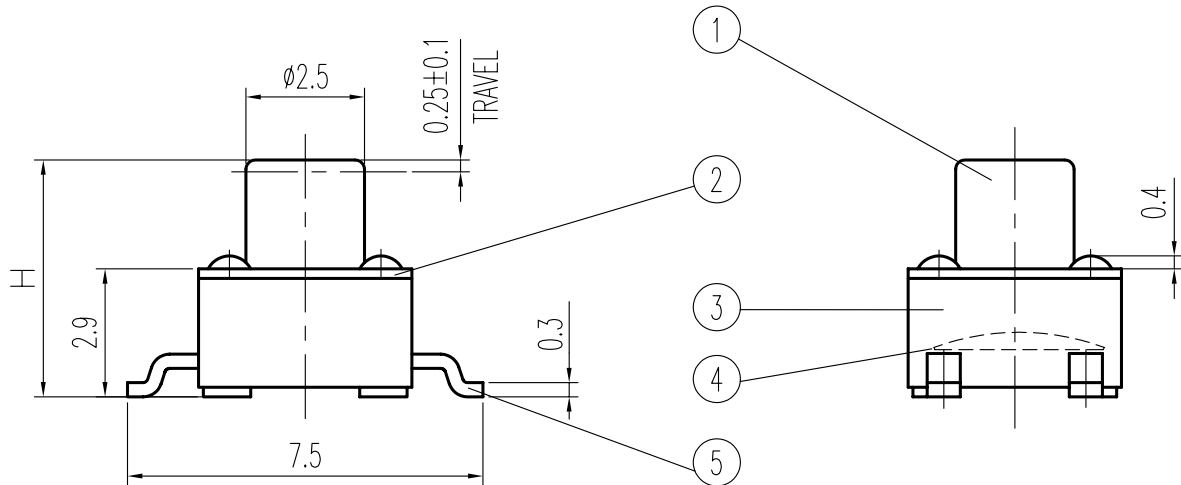

规格 Specifications

额定负荷 Ratings	DC 12 V 50 mA
初期接触电阻 Initial Contact Resistance	100 mΩ Max.
绝缘电阻 Insulation Resistance	DC100 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 250 V(50~60HZ) 60 Sec.
操作力 Operating Force	见上表
负荷寿命 Operating Life With Load	50,000 次 Cycles

示意图 SCHEMATIC

安装孔 PIERCING PLAN

5	端子 TERMINAL	C2680R	⑥	4	Ag PLATED
4	弹片 CONTACT	SUS	⑥	1	Ag CLAD ⑥
3	胶壳 HOUSING	PA	⑥	1	BLACK
2	胶盖 COVER	POLY FILM	⑥	1	NATURAL
1	胶柄 KNOB	PA	⑥	1	—
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	

A02	C2680R-EH → C2680R	见 ⑥	刘红梅	06-03-31
	FILM SR53 → POLY FILM	见 ⑥		
	NATURAL → Ag CLAD	见 ⑥		
	SUS-301 → SUS	见 ⑥		
A01	Add: B 7.0	见 ①	陶海平	05.04.20
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE	

DWG NO. ITEM2258

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	TACT SWITCH		ITEM NO	RS-314R02 -SM		
UNDER 1	± 0.10	DRAWN	刘红梅	06-03-31	VERSION	A02	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-03-31	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	林高全	06-03-31	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.