

1P - 2T





示意图 SCHEMATIC

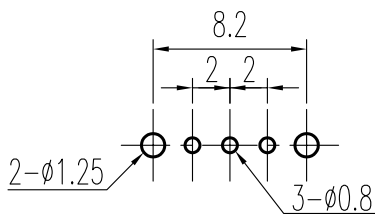

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	DC 30 V 0.3 A
① 初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC 500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 500 V (50~60HZ) 60 Sec.
操作力 Operating Force (gf)	A-B 250±100 B-A 250±100
① 负荷寿命 Operating Life With Load	10000 次 Cycles

6	弹片 SPRING PLATE	C5210R	1	NATURAL
5	端子 TERMINAL	C2680R①	3	Ag PLATED
4	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW
3	接触片 CONTACT	C5210R①	1	Ag CLAD
2	胶柄 KNOB	P O M	1	VG 2 - 7
1	铁壳 FRAME	S P C C	1	Sn PLATED
序 NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A02	接触阻抗 → 初期接触电阻 见①	王光云	06-04-25
	机械寿命 → 负荷寿命 见①		
	C2680R-EH → C2680R 见①		
	C5210R-EH/Ag CLAD → C5210R 见①		
A01		贾忠敏	05-12-25
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM2011			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SIDE KNOB SLIDE SWITCH		ITEM NO	SK-12D24-VG		
UNDER 1	± 0.10	DRAWN	王光云	06-04-25	VERSION	A02	PAGE	1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-04-25	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	林高全	06-04-27	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.