



STAIN FINISHED
(TOKYO BLAST #100)

1.5 TRAVEL

◎规格 Specifications

额定负荷 Ratings	DC 30 V 0.3 A
初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC 500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 500 V (50~60HZ) 60 Sec.

操作力 Operating Force (gf)	A → B
	150 ± 100
负荷寿命 Operating Life With Load	10,000 次 Cycles

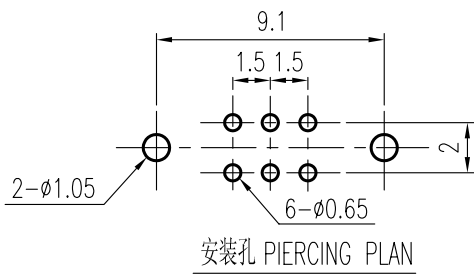

6	弹片 SPRING PLATE	STEEL	1	NATURAL
5	端子 TERMINAL	C2680R◎	6	Ag PLATED
4	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW
3	接触片 CONTACT	C5210R◎	2	Ag CLAD
2	胶柄 KNOB	P B T	1	BLACK C
1	铁壳 FRAME	S P T E	1	NATURAL
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A01	ADD: 规格 Specifications 见◎	王光云	06-05-11
	C2680R-EH → C2680R 见◎		
	C5210R-EH/Ag CLAD → C5210R 见◎		
01		赖立辉	14 SEP 95
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SIDE KNOB SLIDE SWITCH	ITEM NO	SK-22C04-MG 4.4	
UNDER 1	± 0.10	DRAWN	王光云	06-05-11	VERSION	A01
1 - 10	± 0.30	REVIEWED	张念明	06-05-11	SCALE	PAGE 1 OF 1
OVER 10	± 0.50	APPROVED	林高全	06-05-11	PROJECTION	UNIT mm

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.