


示意图 SCHEMATIC

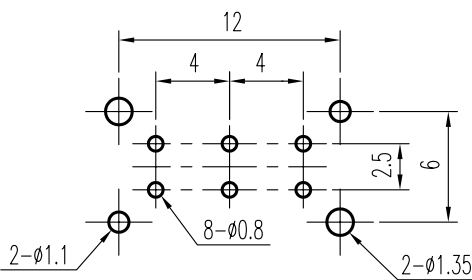

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	DC 30_V 0.3_A
初期接触电阻 Initial Contact Resistance	30_mΩ Max.
绝缘电阻 Insulation Resistance	DC 500_V 60_Sec 100_MΩ Min.
抗电强度 Dielectric	AC 500_V (50~60HZ) 60_Sec.

操作力 Operating Force (gf)	A → B
	250±150
负荷寿命 Operating Life With Load	10,000 次 Cycles

7	钢珠 STEEL BALL	STEEL	1	NATURAL
6	弹簧 SPRING	STEEL	1	NATURAL
5	端子 TERMINAL	C2680R	6	Ag PLATED
4	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW
3	接触片 CONTACT	C5210R	2	Ag CLAD
2	胶柄 KNOB	P O M	1	G 2 - 9
1	铁壳 FRAME	S P C C	1	Sn PLATED
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A02	机械寿命 → 负荷寿命 见 ①	王光云	06-05-29
A01	接触阻抗 → 初期接触电阻 见 ①	王光荣	06-02-21
01	ADD: 规格 Specifications 见 ①	孙斌	02 MAR 01
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SIDE KNOB SLIDE SWITCH		ITEM NO	SK-22H44-G		
UNDER 1	± 0.10	DRAWN	王光云	06-05-29	VERSION	A02	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-06-01	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	高洪	06-06-02	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.