

2P - 3T





示意图 SCHEMATIC

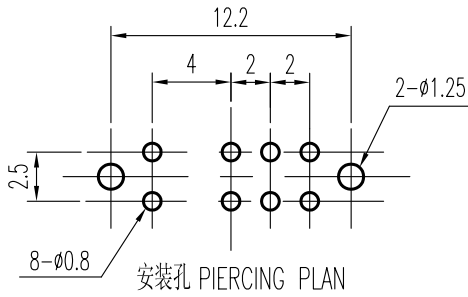

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	DC 30 V 0.3 A
① 初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC500 V 60 Sec 100 M Min.
抗电强度 Dielectric	AC 500 V (50~60HZ) Sec.
操作力 Operating Force (gf)	A → B    B → A
	C → B    B → C
负荷寿命 Operating Life With Load	10,000 次 Cycles

6	弹片	SPRING PLATE	C5210R	1	NATURAL
5	端子	TERMINAL	C2680R	8	Ag PLATED
4	基板	TERMINAL BASE	PHENOL RESIN	1	YELLOW
3	接触片	CONTACT	C5210R	2	Ag CLAD
2	胶柄	KNOB	P O M	1	G 2 - 7
1	铁壳	FRAME	S P C C	1	Sn PLATED
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	

A02	接触阻抗 → 初期接触电阻 见 ①	王光云	06-04-11
A01	ADD: 规格 Specifications 见 ①	王光荣	06-03-09
01		赖立辉	14 MAY 96
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM0046			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SIDE KNOB SLIDE SWITCH	ITEM NO	SK-23D07-G		
UNDER 1	± 0.10	DRAWN	王光云	06-04-11	VERSION	A02	PAGE 1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-04-11	SCALE		UNIT mm
OVER 10	± 0.50	APPROVED	林高全	06-04-11	PROJECTION		

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.