
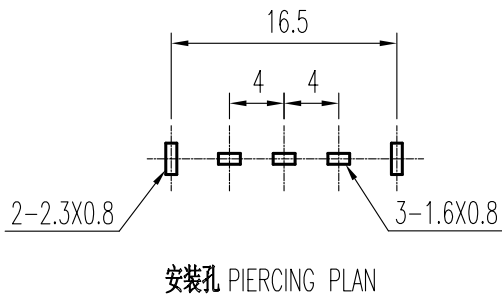

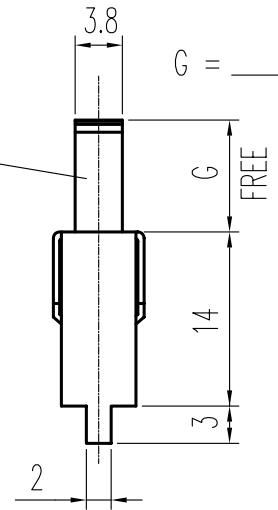


P DETAIL 2 : 1

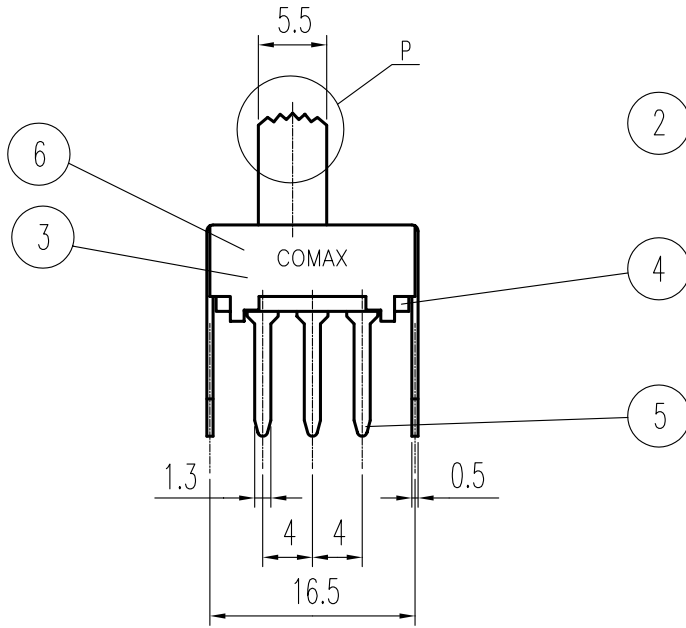

① 规格 Specifications

额定负荷 Ratings	DC 30_V 0.3_A
初期接触电阻 Initial Contact Resistance	30_mΩ Max.
绝缘电阻 Insulation Resistance	DC500_V 60_Sec.100_MΩ Min.
抗电强度 Dielectric Voltage	AC 500_V(50~60HZ) 60_Sec.

操作力 Operating Force (gf)	A—B	(V)
		250±100 450±150
负荷寿命 Operating Life With Load	10,000 次 Cycles	

序号 NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS
6	弹簧 SPRING	STEEL	1	NATURAL
5	端子 TERMINAL	C2680R ①	3	Ag PLATED
4	基板 TERMINAL BASE	PHENOL RESIN	1	BLACK
3	接触片 CONTACT	COPPER WIRE	1	Ag PLATED
2	胶柄 KNOB	P O M	1	G 2 - 15
1	铁壳 FRAME	S P C C	1	Ni PLATED

A01	ADD: 规格 Specifications 见①	刘红梅	06-06-02
01	C2680R-EH — C2680R 见①	赖立辉	12 AUG 93
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM0556			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SLIDE SWITCH	ITEM NO	SS-12F06-G		
UNDER 1	± 0.10	DRAWN	刘红梅	VERSION	A01	PAGE	1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	高洪	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.