

规格 Specifications

额定负荷 Ratings	4A 125V/2A 250VAC
初始接触阻抗 Initial Contact Resistance	100 mΩ Max.
绝缘阻抗 Insulation Resistance	DC 500 V 60±5 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 1500 V(50~60HZ) 60±5 Sec.
操作力 Operating Force	300 ±150gf
机械寿命 Operating Life Without Load	50,000 次 cycles
负荷寿命 Operating Life With Load	UL: 6,000 次 cycles
	TUV: 15,000 次 cycles
	CE: 15,000 次 cycles





示意图 SCHEMATIC

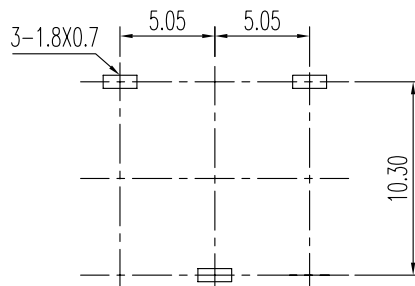

安装孔 PIERCING PLAN

6	弹弓 SPRING	STEEL	1	NATURAL
5	接触片 CONTACT	C1100R	1	Ni PLATED
4	端子 TERMINAL	C1100R	3	Ag PLATED
3	胶盖 COVER	PA	1	BLACK
2	胶壳 HOUSING	PA	1	BLACK
1	胶柄 KNOB	PA	1	BLACK
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A02	增加认证标志及负荷寿命规格, 见标注 ①	方 勇	06-01-19
A01		方 勇	05-09-26
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE

DWG NO. ITEM2562

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SLIDE SWITCH		ITEM NO	SS-12J08-G 2.5 NS		
UNDER 1	± 0.10	DRAWN	方 勇	06-01-19	VERSION	A02	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	林高全	06-01-20	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	高 洪	06-01-20	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.