


示意图 SCHEMATIC

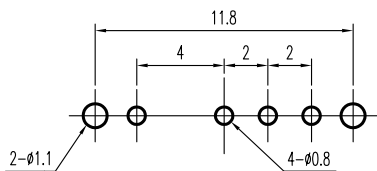

安装孔 PIERCING PLAN

⑥规格 Specifications

额定负荷 Ratings	DC 30_V 0.3_A
初期接触电阻 Initial Contact Resistance	30_mΩ Max.
绝缘电阻 Insulation Resistance	DC500_V 60_Sec. 100_MΩ Min.
抗电强度 Dielectric	AC 500_V (50~60HZ) 60_Sec.

操作力 Operating Force (gf)	A → B	B → A
	200±100	250±100
负荷寿命 Operating Life With Load	10,000 次 Cycles	

6	弹片 SPRING PLATED	C5210R	1	NATURAL
5	端子 TERMINAL	C2680R ⑥	4	Ag PLATED
4	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW
3	接触片 CONTACT	C5210R ⑥	1	Ag CLAD
2	胶柄 KNOB	P O M	1	G 2 - 6
1	铁壳 FRAME	S P T E	1	NATURAL
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A01	ADD: 规格 Specifications 见 ⑥	王光云	06-03-31
	C2680R-EH → C2680R 见 ⑥		
	C5210R-EH/Ag CLAD → C5210R 见 ⑥		
02	ADD: 0.10±0.05 见 ⑥	赖立辉	16 NOV 01
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE

DWG NO. ITEM1535	
TOLERANCES UNLESS OTHERWISE SPEC.	TITLE SLIDE SWITCH
ITEM NO SS-13D01-G	VERSION A01
UNDER 1 ± 0.10	DRAWN 王光云 06-03-31
1 - 10 ± 0.30	REVIEWED 张念明 06-04-03
OVER 10 ± 0.50	APPROVED 林高全 06-04-03
SCALE	PROJECTION
PAGE 1 OF 1	UNIT mm

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.