

1P - 3T





示意图 SCHEMATIC

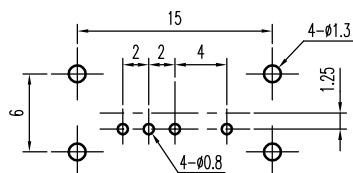

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Rdtings	DC 30_V 0.3_A
接触阻抗 Contact Resistance	30_mΩ Max.
绝缘阻抗 Insulation Resistance	DC500V 60_Sec.100_MΩ Min.
抗电强度 Dielectric	AC 500_V(50~60HZ) 60_Sec.

操作力 Operating Force	(Z)	
	200±100,300±150gf	300±150,500±150gf
机械寿命 Operating Life Without Load	10000 次 Cycles	

5	端子 TERMINAL	C2680R	4	Ag PLATED			
4	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW			
3	接触片 CONTACT	C5210R	1	Ag CLAD			
2	胶柄 KNOB	P O M	1	G 2 - 9	(Z)	ADD:(Z)300±150,500±150gf	Zhang NM 2005-06-24
1	铁壳 FRAME	S P C C	1	Ni PLATED	标号 REV	内容 DESCRIPTION	签名 SIGN. 日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM1596		

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SLIDE SWITCH		ITEM NO	SS-13D12-G	
UNDER 1	± 0.10	DRAWN	Zhang QJ	2005-06-24	VERSION	A01	PAGE 1 OF 1
1 - 10	± 0.30	REVIEWED	Zhang NM	2005-06-24	SCALE	3 : 1	UNIT mm
OVER 10	± 0.50	APPROVED	Gao Hong	2005-06-24	PROJECTION		

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.