

2P - 2T





示意图 SCHEMATIC

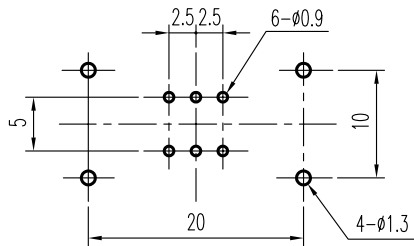

安装孔 PIERCING PLAN

ITEM NO.	ALUMINIUM CAP COLOR
TS-22E02-C	NATURAL
TS-22E02-CB	BLACKENED

Specifications

额定负荷 Ratings	DC 30 V 0.3 A
初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC 500V 60±5Sec. 100 Ω Min.
抗电强度 Dielectric	AC 500 V(50~60HZ) 60±5Sec.
操作力 Operating Force	A → B 200±100 gf
负荷寿命 Operating Life With Load	10,000 次 Cycles

11	弹簧 SPRING	STEEL	1	NATURAL
10	钢钉 RIVET	BRASS	1	NATURAL
9	钢珠 STEEL BALL	STEEL	1	NATURAL
8	导向片 GUIDANCE PLATE	S P C C	1	Ni PLATED
7	端子 TERMINAL	C2680R ①	6	Ag PLATED
6	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW
5	接触片 CONTACT	C5210R ①	2	Ag CLAD
4	胶壳 HOUSING	P O M	1	BLACK C
3	胶柄 KNOB	P O M	1	C9 -18
2	铝套 ALUMINIUM CAP	ALUMINIUM	1	见上表
1	铁壳 FRAME	S P C C	1	Ni PLATED
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A01	ADD: Specifications、成品型号表栏 见①	刘红梅	06-05-25
	C2680R-EH → C2680R 见①		
	C5210R-EH/Ag CLAD → C5210R 见①		
01		赖立辉	1992/12/4
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM0406			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	TOGGLE SWITCH		ITEM NO
UNDER 1	± 0.10	DRAWN	刘红梅	06-05-25	VERSION A01
1 - 10	± 0.30	REVIEWED	张念明	06-05-26	PAGE 1 OF 1
OVER 10	± 0.50	APPROVED	高洪	06-06-02	SCALE
					UNIT mm
					PROJECTION

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.