

2P - 2T





示意图 SCHEMATIC

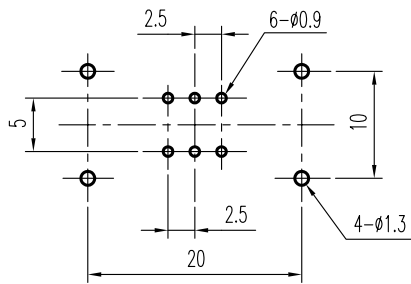

安装孔 PIERCING PLAN

①

Specifications

额定负荷 Ratings	DC 30 V 0.3 A
初期接触电阻 Initial Contact Resistance	30 m $\Omega$ Max.
绝缘电阻 Insulation Resistance	DC 500V 60 $\pm$ 5Sec. 100 M $\Omega$ Min.
抗电强度 Dielectric	AC 500 V(50~60HZ) 60 $\pm$ 5Sec.
操作力 Operating Force	A $\longleftrightarrow$ B 250 $\pm$ 100 gf
负荷寿命 Operating Life With Load	10,000 次 Cycles

11	弹簧 SPRING	STEEL	1	NATURAL
10	锅钉 RIVET	BRASS	1	NATURAL
9	钢珠 STEEL BALL	STEEL	1	NATURAL
8	导向片 GUIDANCE PLATE	S P C C	1	Ni PLATED
7	端子 TERMINAL	C2680R ①	6	Ag PLATED
6	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW
5	接触片 CONTACT	C5210R ①	2	Ag CLAD
4	胶壳 HOUSING	P O M	1	BLACK C
3	胶柄 KNOB	P O M	1	C 9 - 18
2	铝套 ALUMINIUM CAP	ALUMINIUM	1	NATURAL
1	铁壳 FRAME	S P C C	1	Ni PLATED
序NO	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A01	ADD: Specifications 见①		
	C2680R-EH $\rightarrow$ C2680R 见①	刘红梅	06-05-30
	C5210R-EH/Ag CLAD $\rightarrow$ C5210R 见①		
01		赖立辉	1998/3/26
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. ITEM0410			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	TOGGLE SWITCH		ITEM NO	TS-22E03-C	
UNDER 1	$\pm 0.10$	DRAWN	刘红梅	06-05-30	VERSION	A01	PAGE 1 OF 1
1 - 10	$\pm 0.30$	REVIEWED	张念明	06-06-01	SCALE		UNIT mm
OVER 10	$\pm 0.50$	APPROVED	高洪	06-06-02	PROJECTION		

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.